AL5C Fitting Instructions

Appropriate Fixings
(dependant on roof &/or
Structural opening type)



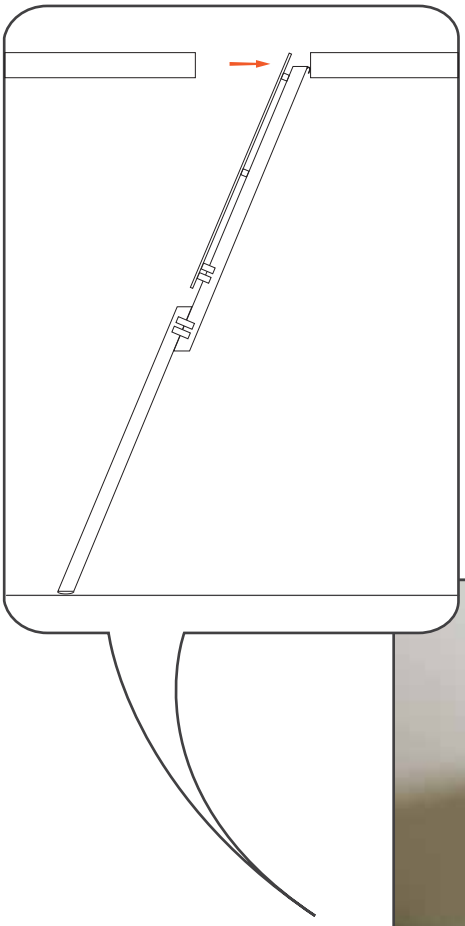

1

Extend ladder by depressing silver spring catches and raising rear section until fully extended.

Rest the ladder into a desired position within the structural opening.

Hold the bar against the timber frame. Use a spirit level to make sure it is perfectly straight. Mark the screw holes with a pencil.

Remove the bar and drill small pilot holes into the wood (this prevents the timber from cracking).

Put the bar back up and drive the screws in tightly until the bar Fixed.

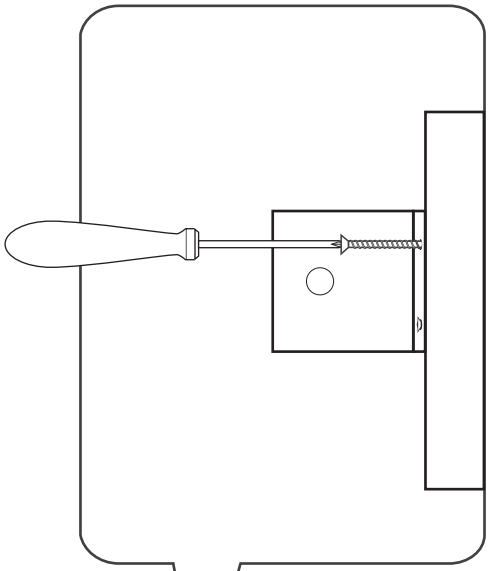

Align the top hooks with the mounting bar and lower the ladder until it locks firmly into place.

Always verify that both hooks are centered and stable.