# Anti-Ligature Access Panel

## ANTILIG-PF or ANTILIG-BF

BFFD
BEADED FRAME

60 MIN
FIRE RATED

- Certified to a minimum 60 minute fire rating.
- Smoke Tested to BS EN 1634-3:2004.
- Fire tested to BS 476 Part 22, in walls and ceilings.
- Sound tested to provide 36dB acoustic reduction.
- Steel Access Panel designed to prevent the attachment of ligatures.
- Supplied with key lock.
- Powder-coated in white RAL9010 with satin finish.

MADE IN THE UK | 1Hr Fire Rated | ACOUSTIC REDUCTION | SMOKE TESTED | SAFETY PRODUCT

| CODE | PANEL SIZE | STRUCTURAL OPENING | OVERALL SIZE INC. FRAME | CLEAR OPENING ONCE INSTALLED | DEPTH | WEIGHT |
|---|---|---|---|---|---|---|
| ANTILIG-PF/BF-150 | 150 × 150mm | 155 × 155mm | 200 × 200mm | 75 × 80mm | 52mm | 1.3kg |
| ANTILIG-PF/BF-200 | 200 × 200mm | 205 × 205mm | 250 × 250mm | 120 × 140mm | 52mm | 1.9kg |
| ANTILIG-PF/BF-300 | 300 × 300mm | 305 × 305mm | 350 × 350mm | 220 × 264mm | 52mm | 3.2kg |
| ANTILIG-PF/BF-350 | 350 × 350mm | 355 × 355mm | 400 × 400mm | 270 × 314mm | 52mm | 3.9kg |
| ANTILIG-PF/BF-450 | 450 × 450mm | 455 × 455mm | 500 × 500mm | 370 × 412mm | 52mm | 5.5kg |
| ANTILIG-PF/BF-550 | 550 × 550mm | 555 × 555mm | 600 × 600mm | 470 × 514mm | 52mm | 7.1kg |
| ANTILIG-PF/BF-600×300* | 600 × 300mm | 605 × 305mm | 650 × 350mm | 564 × 235mm | 52mm | 5.6kg |
| ANTILIG-PF/BF-600 | 600 × 600mm | 605 × 605mm | 650 × 650mm | 520 × 564mm | 52mm | 8.4kg |

*Hinged long side

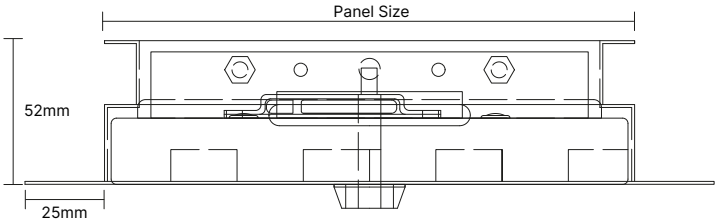


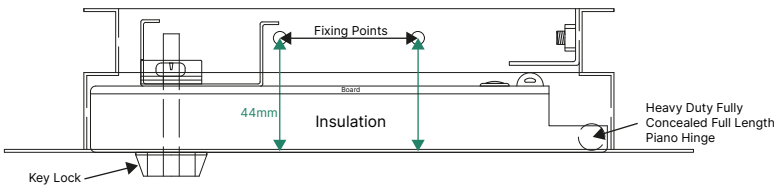


### Anti-ligature Disclaimer

The anti-ligature design elements of this access panel are not intended to replace the need for necessary supervision of those who may be at risk, or for other mandatory protective measures to be utilised for the specific usage. We do not offer any products for sale as being "ligature-free" and will not be liable for claims associated with ligature attachment on its hatches/panels