# Acoustic Ceiling Access Solution

## Multi-Compatible Acoustic Ceiling Access

COMPATIBLE WITH ALL MAJOR CEILING SYSTEM SUPPLIERS

British Gypsum SAINT-GOBAIN

KNAUF CEILING Solutions

siniat

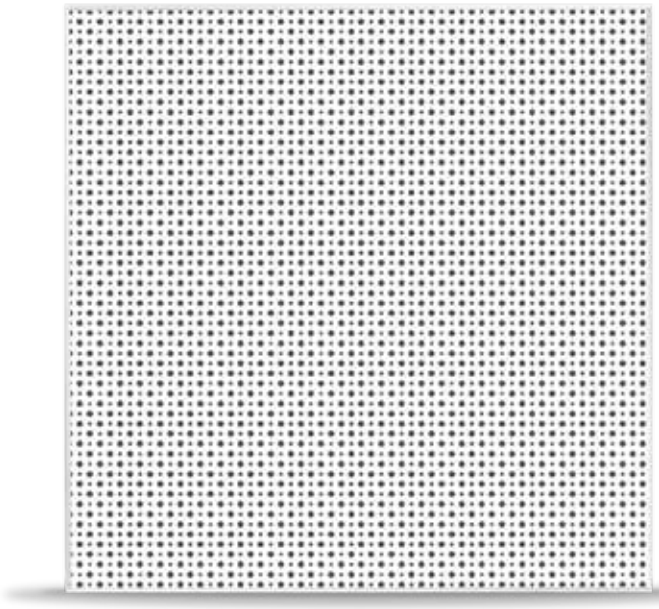

MADE IN THE UK

LOCK OPTIONS

**Bespoke Sizes Up To**
**900 × 600mm**

SEAMLESS SURFACE

**NOTE:**
Independent bracing or support may be required to take the weight of the Access Panel.

- Touch Latch locks as standard
- Manufactured from 0.9mm Zintec Steel
- Manufactured with an exposed edge frame.
- Pivot hinged door leaf
- Budget Locking option available.
- Powder Coated RAL 9010 30% Gloss
- Non-Fire Rated Product

The Acoustic Ceiling System range of Access Panels are simple to install and suitable for ceilings allowing easy access where regular maintenance to services is required. The panel has a metal door tray to take the board inlay on site.

Make sure the structural opening is at least 7mm larger than the panel size, back of frame size. e.g. a 900 x 600mm panel size requires a 907 x 607mm hole size. Remove the door from the frame and place the frame into the set hole. Fix through the appropriate fixing holes within the frame ensuring the frame is pushed up against the structural opening surround. Check the frame is square by measuring corner to corner.
Refit the door and lock in place; the door and frame should be flush.

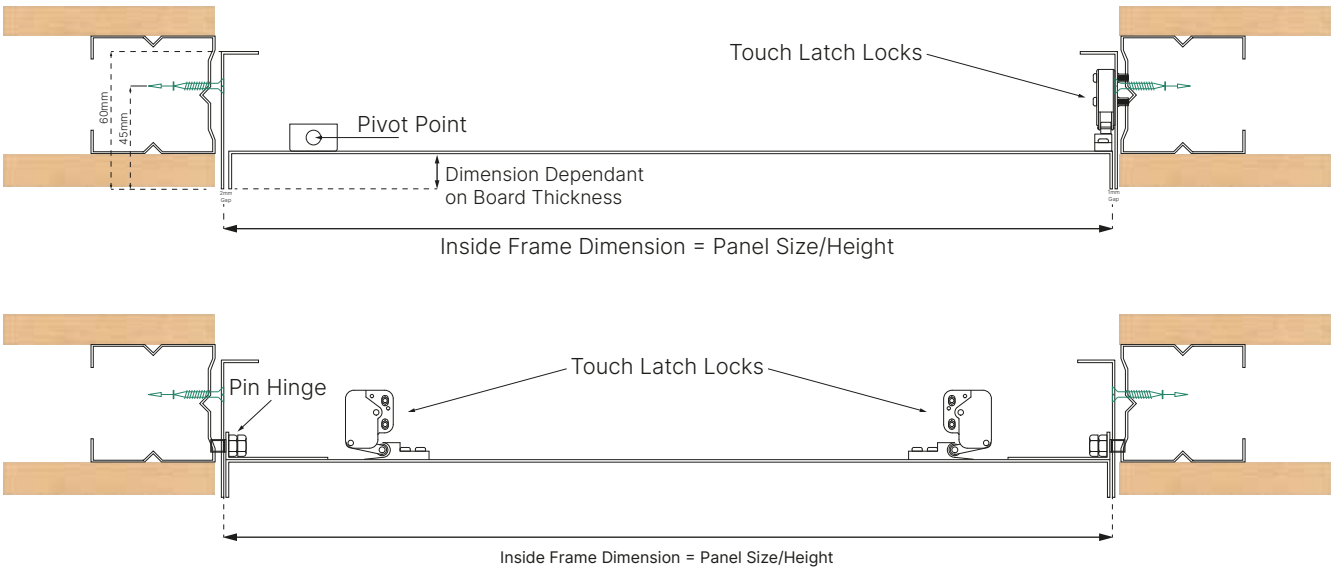


** Please advise the thickness of board required when ordering and specify if this is to take decorative board.