PFFD-AT Air Tested Access Panel

PFFD-AT Picture Frame or BFFD-AT Beaded Frame

BFFD
BEADED FRAME

60 MIN
FIRE RATED

- Air Tested to 0.22 M3/hr/lm.
- 34dB sound reduction on UKAS test.
- Certified to a minimum 60 minute fire rating.
- BS EN 1634-3 Smoke Test (15 times better than the required standard).
- Budget or Tamper Proof Locking Options.
- Powder-coated in white RAL9010 with satin finish.
- Tested to BS EN 1634-1:2008 / BS EN 1364-2:1999 or BS476 Part22.

CODE	PANEL SIZE	STRUCTURAL OPENING	OVERALL SIZE INC. FRAME	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
PFFD/BFFD-AT-150×150	150 × 150mm	155 × 155mm	200 × 200mm	75 × 80mm	50mm	1.7kg
PFFD/BFFD-AT-200×200	200 × 200mm	205 × 205mm	250 × 250mm	120 × 140mm	50mm	2.4kg
PFFD-AT-230×150*	230 × 150mm	235 × 155mm	280 × 200mm	210 × 105mm	50mm	2.1kg
PFFD/BFFD-AT-300×300	300 × 300mm	305 × 305mm	350 × 350mm	220 × 164mm	50mm	4.3kg
PFFD/BFFD-AT-350×350	350 × 350mm	355 × 355mm	400 × 400mm	270 × 314mm	50mm	5.4kg
PFFD/BFFD-AT-400×400	400 × 400mm	405 × 405mm	450 × 450mm	310 × 350mm	50mm	5.8kg
PFFD/BFFD-AT-450×450	450 × 450mm	455 × 455mm	500 × 500mm	370 × 412mm	50mm	7.6kg
PFFD/BFFD-AT-500×500	500 × 500mm	505 × 505mm	550 × 550mm	418 × 460mm	50mm	8.2kg
PFFD/BFFD-AT-550×550	550 × 550mm	555 × 555mm	600 × 600mm	470 × 514mm	50mm	10.6kg
PFFD/BFFD-AT-600×300*	600 × 300mm	605 × 305mm	650 × 350mm	565 × 235mm	50mm	6.7kg
PFFD/BFFD-AT-600×600	600 × 600mm	605 × 605mm	650 × 650mm	520 × 564mm	50mm	12.0kg
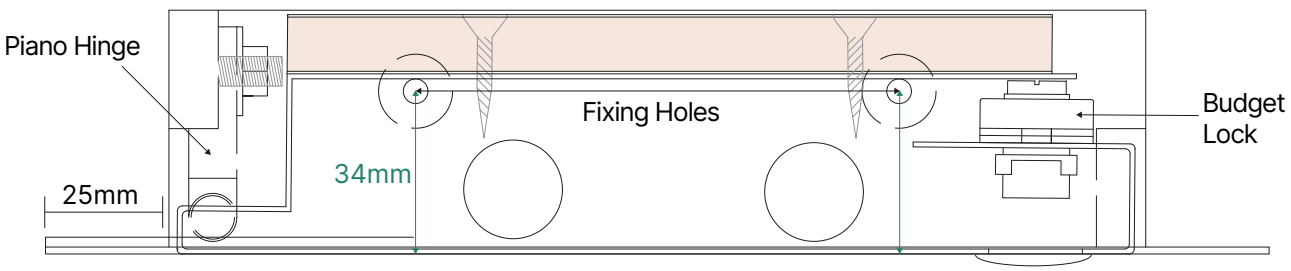
*Hinged long side