

SD Fire Rated Loft Hatch - Bespoke Product Available

SD Fire Rated - Part B & Part L Compliant (5 Sizes)



60 MINUTE
FIRE RATED
LOFT HATCH



PLEASE NOTE:

Two Locks will be added to sizes above 600mm width



MADE IN THE UK



AIR TESTED




BESPOKE AVAILABLE

Bespoke Sizes Made To Order

Sizes up to 900 × 900mm

- UKAS accredited 1 hour fire test.
- Tested to "Part B" BS EN 1634-1:2008 and BS EN 1634-2:1999.
- Complies with Part L & NHBC Building Regulations.
- Air tested to a superb result of 0.76m³/hr @ 50Pa
- Budget Or Key Locking options available.
- The loft hatch colour is white RAL No. 9010 with 20% gloss.
- Unrivalled insulation properties @ 0.32 "U" value
- Pole available as separate item (not suitable for Key Lock).

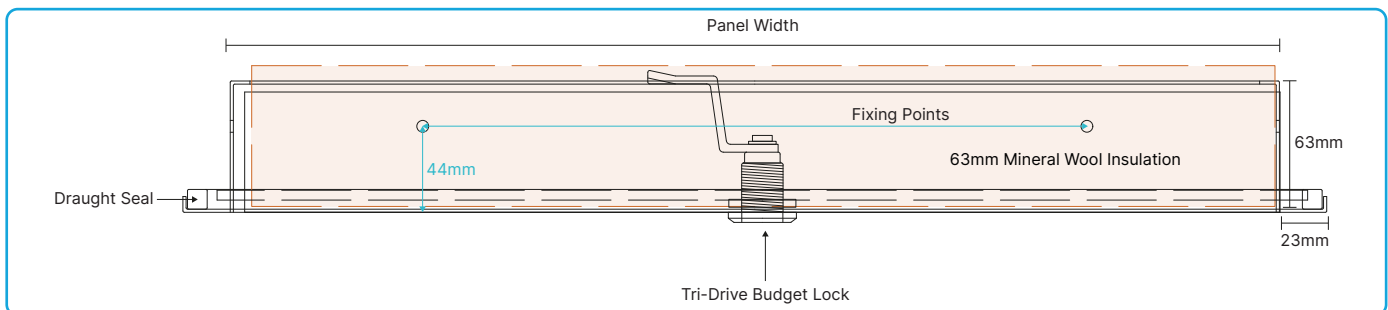

CODE	HATCH SIZE	STRUCTURAL OPENING	CLEAR OPENING ONCE INSTALLED	DEPTH	"U" Value
SD-555×755	555 × 755mm*	555 × 755mm	520 × 630mm	63mm / 65mm	0.32
SD-550X550	550 × 550mm	555 × 555mm	530 × 480mm	63mm / 65mm	0.32
SD-555X800	555 × 800mm	560 × 805mm	535 × 730mm	63mm / 65mm	0.32
SD-600X600	600 × 600mm	605 × 605mm	580 × 530mm	63mm / 65mm	0.32
SD-600X900	600 × 900mm	605 × 905mm	580 × 828mm	63mm / 65mm	0.32

*Note: Actual hatch size is 536 × 736mm to fit a ceiling cut out of 555 × 755mm when lined with 9.5mm fireboard. Other sizes do not need lining with fireboard

NOTES: