

Insulated Electric Meter Box

Premium quality for use with external wall insulation (EWI)



- Insulated and air sealed electric meter box
- Fire retardant
- Calculated U Value 0.35 W/m²K
- The first of its kind in the UK
- Designed and made in the UK
- Bespoke sizes and RAL colours available

Description:

Designed to maintain insulation and draught proofing while providing easy access to electricity meters in homes where external insulation is being added. The Met-Box-Ins boasts a number of innovative design features geared towards helping reduce heat loss in older properties (Patent Application No. 2116780.4.) The door is operated with a tri-drive lock which operates a 2-point locking system to secure the door to the frame at the top and bottom edges. The door is fitted with an opening handle for convenience and is secured by a safety wire and clip to prevent the door being over extended in windy conditions. When closed the door presses against an air seal, the head and sill are gently chamfered to expel moisture and prevent ingress.

Construction and finish:

Fabricated from 1.2mm Zintec steel which is primed and then powder-coated. Photo shows white RAL9016 (other RAL colours available). The outer frame and door are packed with mineral wool insulation. The door can be hinged on either the right or left side thanks to quick release hinges. The fixing flanges are offset from the main body, the back edge of the unit is fitted with seal strip in order to prevent cold bridging.

Access Building Products, Unit 86, Marston Moor Business Park, Tockwith YO26 7QF

T: 01423 874 753 E: info@accessbuildingproducts.co.uk


www.accessbuildingproducts.co.uk

Insulated Electricity Meter Box

Premium quality for use with external insulation




With internal fixing flange

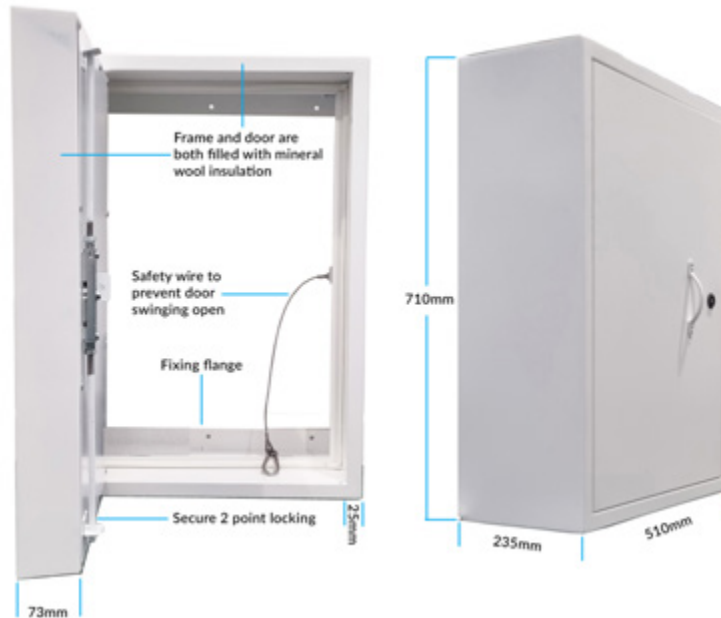

Dimensions (mm) H: 710 x W: 510 x D: 235 (external) - Custom sizes available
H: 570 x W: 460 (internal clear opening)

With external fixing flange

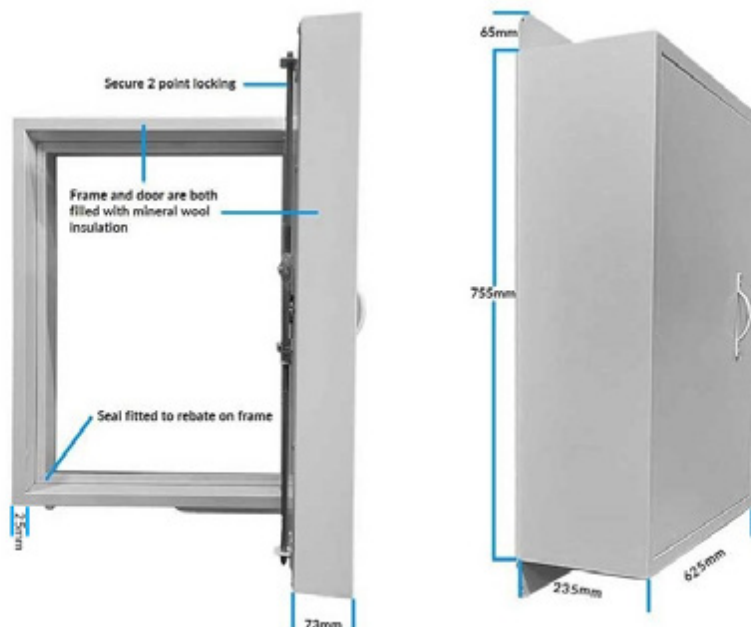

Dimensions (mm) H: 755 x W: 625 x D: 235 (external) - Custom sizes available
H: 700 x W: 575 (internal clear opening)